

120~240MHz N TYPE DIRECTIONAL COUPLER



Tone Spread
Solutions for Wireless Signal


Communications Technology & Engineering Accessories

Rev.V1.0

120~240MHz N Type Micro-Strip Directional Coupler:

Item	Specification	
Model	DC-12.24-200-XMNI	
Frequency Range	120~240 MHz	
Coupling	6±1.0 dB	10±1.0 dB
Insertion loss	1.76 dB	0.80 dB
VSWR	1.25:1	
Directivity	20 dB	
Average Power	200 W	
Reflected Power(MAX)	40 W	100 W
Impedance	50 (Ω)	
Connector	N/Female	
Temperature Range	-35 - +85 (°C)	
Housing Finish Color	Black / Gray / Frosted Matte Black	
Applications	Indoor/Outdoor Use , IP65 , RoHS Compliant	

Product Drawing:

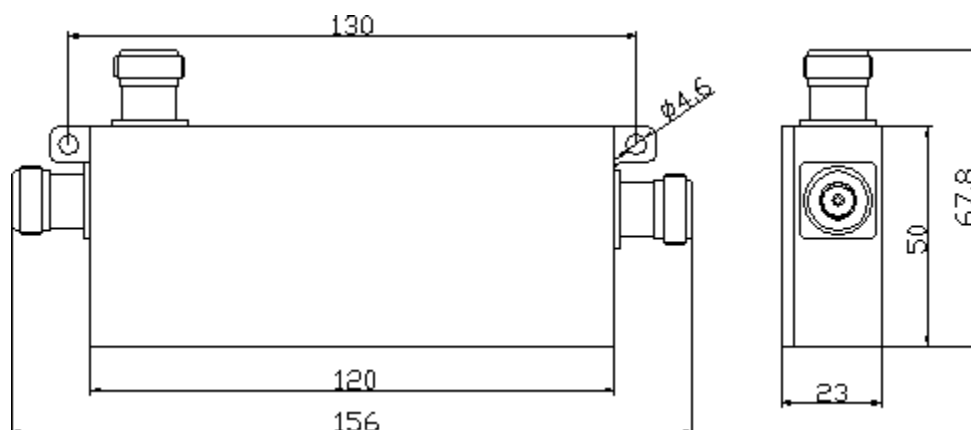

Note: The drawing is only for reference, please make the object as the standard.

