

## Power Splitters (617-5925MHz, 4.3-10, Flange)


### Features

- Ultra Wide Band from 617MHz to 5925MHz
- Indoor & Outdoor for All 2/3/4/5G Mobile Networks & WIFI
- Low PIM/Low Insertion Loss/High Power Capacity
- Electrostatic Powder Coating, IP67
- 720h Salt Spray Model Selectable
- RoHS Compliant



### Specifications

PRODUCT CODE	SP2-0560-0-4F160 SP3-0560-0-4F160 SP4-0560-0-4F160		
Configurations	1:2	1:3	1:4
<b>Electrical Specifications</b>			
Frequency	617-5925MHz		
Split Loss	3.0 dB	4.8 dB	6.0 dB
Insertion Loss (dB)	0.20 @ 617-2700MHz 0.30 @ 3300-3800MHz 0.50 @ 4900-6000MHz	0.20 @ 617-2700MHz 0.35 @ 3300-3800MHz 0.60 @ 4900-6000MHz	0.25 @ 617-2700MHz 0.35 @ 3300-3800MHz 0.80 @ 4900-6000MHz
VSWR	≤1.25	≤1.30	≤1.35
Power Capacity	Avg. 300W, Peek 1.2kW		
Impedance	50 Ω		
Intermodulation	≤-161dBc @ 2 x 43dBm		
<b>Environment Specifications</b>			
Environment	ETS 300 019		
Operating Temp.	-35°C to +75 °C		
Relative humidity	0~95%		
Application	IP67, Electrostatic Powder Coating/Light Grey		
Salt Spray Pass	720 Hours Customizable		
<b>Mechanical Specifications</b>			
Dimensions (mm)	245 x 67 x 23	269 x 67 x 23	322 x 67 x 23
Weight (Kg)	0.55	0.65	0.85
RF Connector	4.3-10 female/Flange		

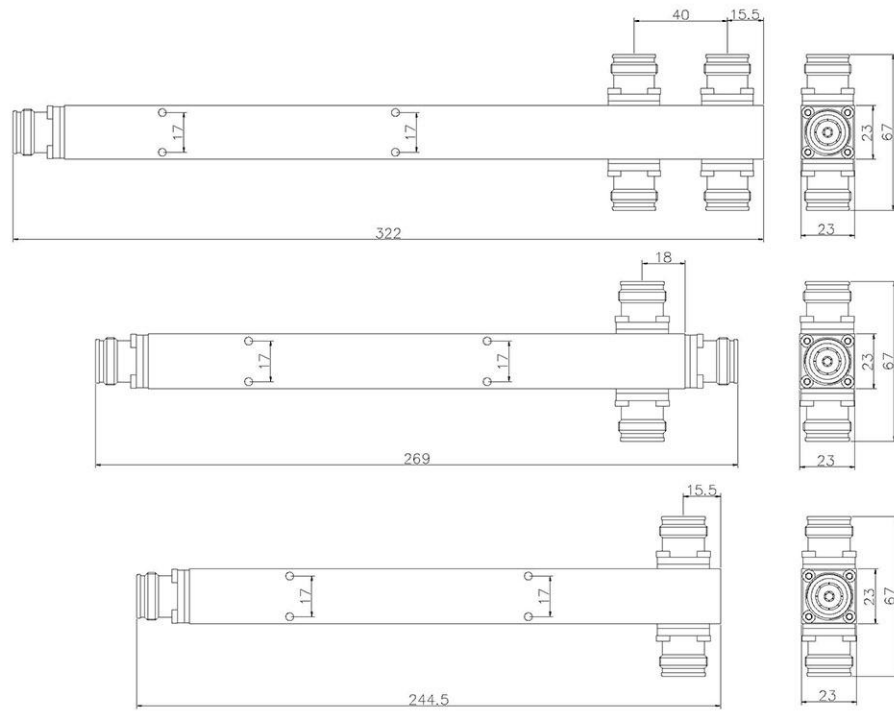

*(4.3-10 Connector)*