



**Tone Spread**  
Solutions for Wireless Signal

# Tone Spread Technology Co., Ltd.

698-4000MHz Low PIM Slim Omni Antenna

Model: CE-698-4000-4A-NV3 (N female)


CE-698-4000-4A-MV3 (4.3-10 female)




<b>Electrical Specifications</b>				
Frequency Range, MHz	698-960	1710-2170	2170-2700	3300-4000
Gain, dBi	2.5	4.0	5.0	4.0
VSWR	≤2.0	≤1.8	≤1.8	≤1.8
Polarization	Horizontal			
PIM, 3rd Order, 2x20W	≤-153 dBc			
Horizontal Beamwidth	360°			
Vertical Beamwidth	116°	78°	70°	65°
Input Impedance	50 Ω			
Max. Input Power	50 W			
Lightning Protection	DC Ground			
<b>Mechanical Specifications</b>				
Connector	N Female		4.3-10 Female	
Dimensions	Ø 190x7.3 mm			
Weight	0.25 kg			
Color	White			
Reflector Material	Aluminum			
Radome Material	ABS (UV Stabilized)			
Operating Temperature	-40°C to +65 °C			

## Radiation Patterns

Horizontal

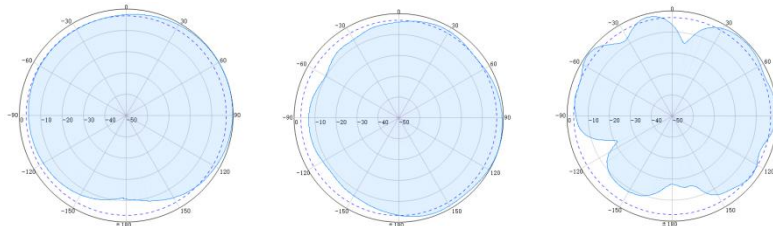

Vertical

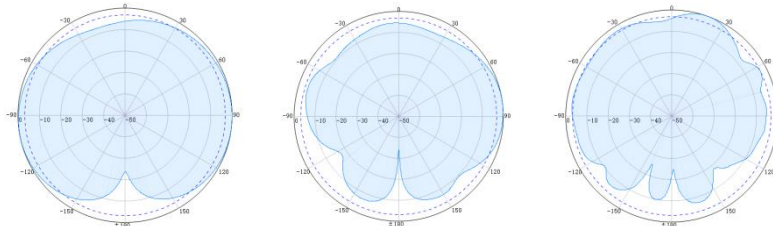

750MHz

2170MHz

3800MHz

Add: 2F No.141. Fu-Gang St. Taipei, Taiwan

Tel: +886-2-2882-8979

Email: sales@tspd.com.tw

Fax: +886-2-2882-9196

Website: [www.tspd.com.tw](http://www.tspd.com.tw)