

575-3800MHz 4.3/10 TYPE HYBRID COUPLER



Tone Spread
Solutions for Wireless Signal

Telecommunication Technology & Engineering Accessories


Rev.V1.1

4.3/10 MD Type Type 3dB Hybrid Combiner (575-3800MHz):

Item	HB-538-200-3C43MDH
Frequency Range (MHz)	575-3800 MHz
Coupling (dB)	3.1dB +/-0.9 dB
VSWR	≤1.25
Insertion Loss (dB)	<0.2 dB
Isolation (dB)	≥23
Power (W)	200
PIM	<-161dBc@2X43dBm *
Impedance (Ω)	50
Temperature Range (°C)	-25~+85
Relative Humidity	0% to 100%
Connector	4.3/10 MINI DIN-Female
Environmental	IP65 , RoHS Compliant

* The PIM value is reflect @ 900MHz and 1800MHz

Product Drawing:

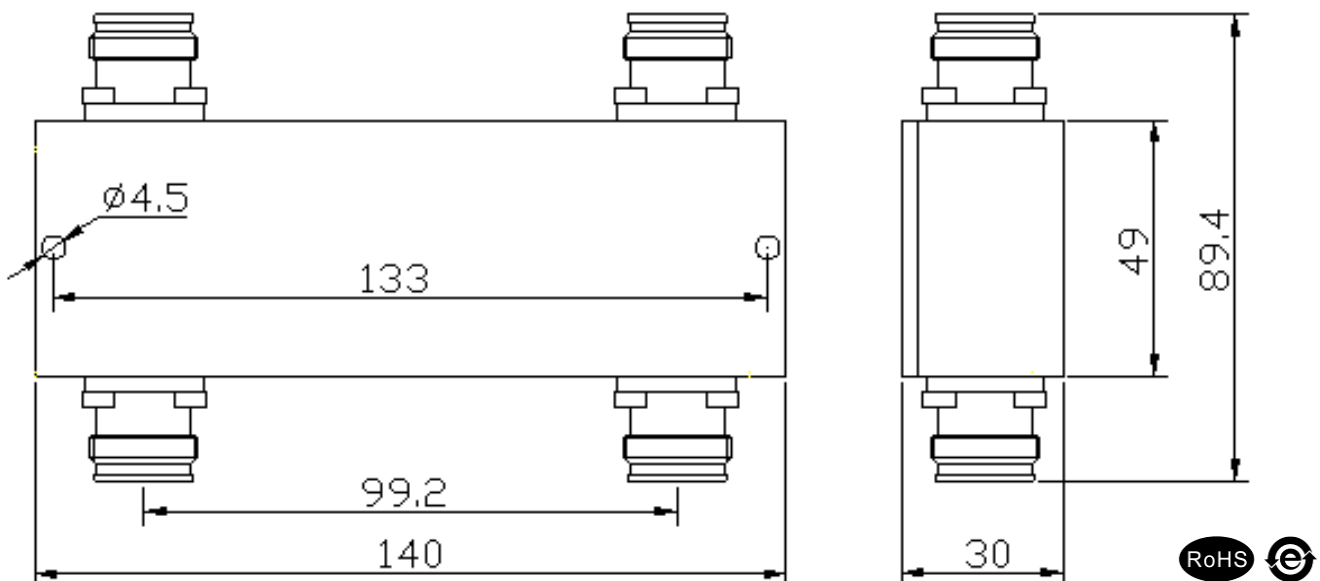

All specifications are subject to change without notice.

©2019 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw