

# 698-3800MHz DIN TYPE 4X4 PORT 6DB HYBRID COMBINER



**Tone Spread**  
Solutions for Wireless Signal

**Telecommunication Technology & Engineering Accessories**


Rev.V1.1

7/16(DIN) Type 4X4 Port Hybrid Combiner (698-3800MHz):

Model	HB-738-200-6CDI
Frequency Range	698-3800 MHz
Coupling	6.1±1.0 dB
VSWR	≤1.25
Insertion loss	≤0.5 dB
Isolation	≥23 dB
Intermodulation	-155dBc@2x43dBm *
Power handling	200W Every Input
Impedance	50Ω
Connector	7/16(DIN)-Female
Application	Indoor / Outdoor
Temperature Range ( °C )	-30~+85
Waterproof	IP65/RoHS

\* The PIM value is reflect @ 900MHz and 1800MHz

Product Drawing:

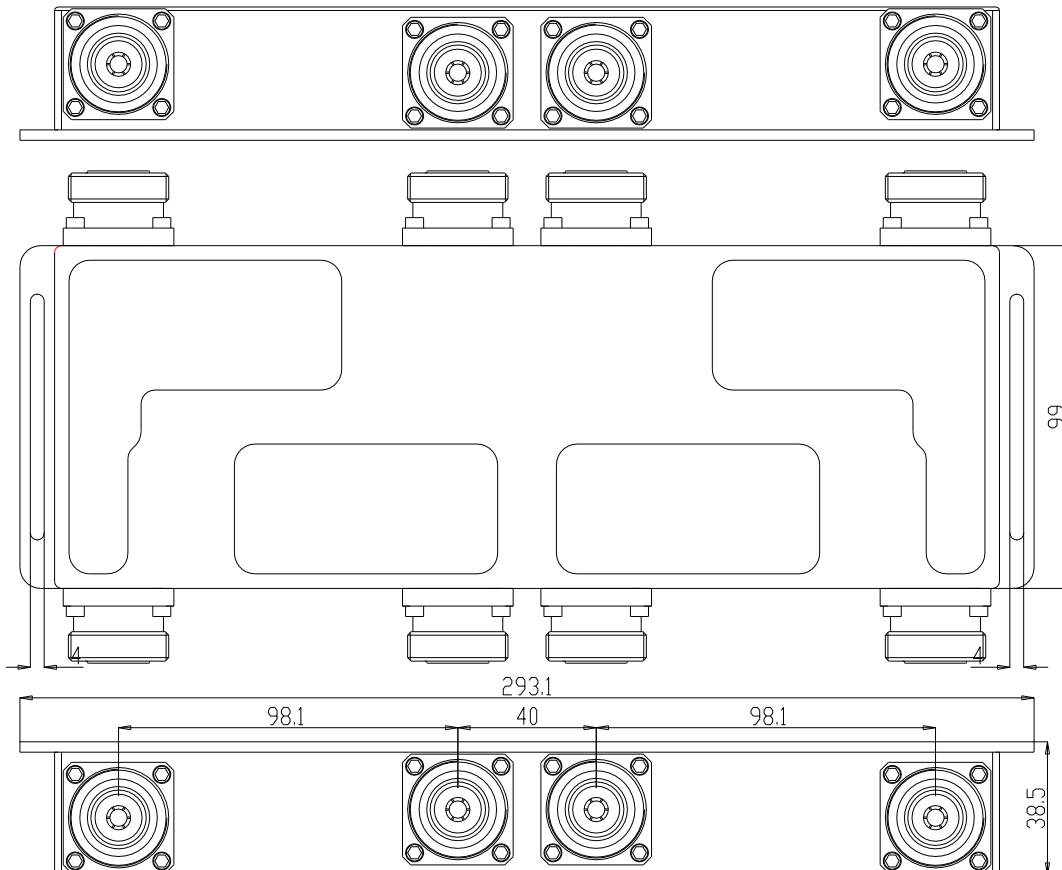

All specifications are subject to change without notice.

©2019 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: [sales@tspd.com.tw](mailto:sales@tspd.com.tw)