



JIETONG DIGITAL

GET CONNECTED

4G 6dBi Magnetic Antenna

Model NO.	JTD605961			
Electrical Specifications				
Frequency Range-MHz	617-960	1427-2690	3300-5000	5150-5925
Peak Gain-dBi	~1.0	~2.9	~2.5	~0.4
Average Gain-dBi	--2.2	--2.6	--5.7	--6.4
Return Loss-dB	--11.5	--10.4	--7.4	--6.6
VSWR	1.8	1.9	2.6	2.8
Impedance-Ohm	50			
Polarization	Linear			
Radiation Pattern	Omni-Directional			
Maximum Power -W	35			
F/B ratio-dB	20			
Lightning Protection	DC Ground			
Mechanical Specifications				
Antenna Cover Material	PP & Brass			
Connector Type	SMA male Standard(Customized)			
Cable Type	LMR100 Standard(Customized)			
Cable Length	3 Meters(Customized)			
Working Temperature	-40°C~+85°C			
Size	32*32*73mm			
Antenna Weight	0.08kg			
Mounting	Magnetic Mount			
Substance Compliance	RoHs			
Carton size	40*30*21CM			
Package weight	8.8KG/100pcs			









JIETONG DIGITAL



GET CONNECTED

4G 6dBi Magnetic Antenna

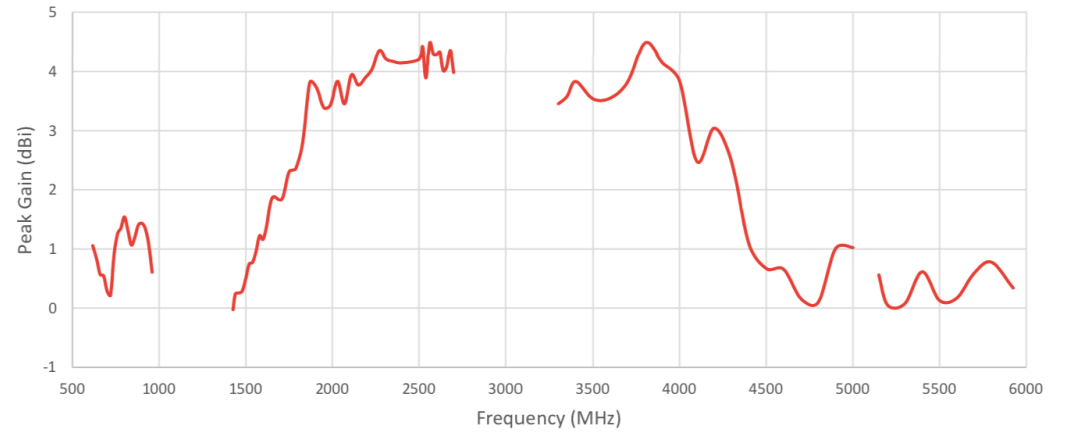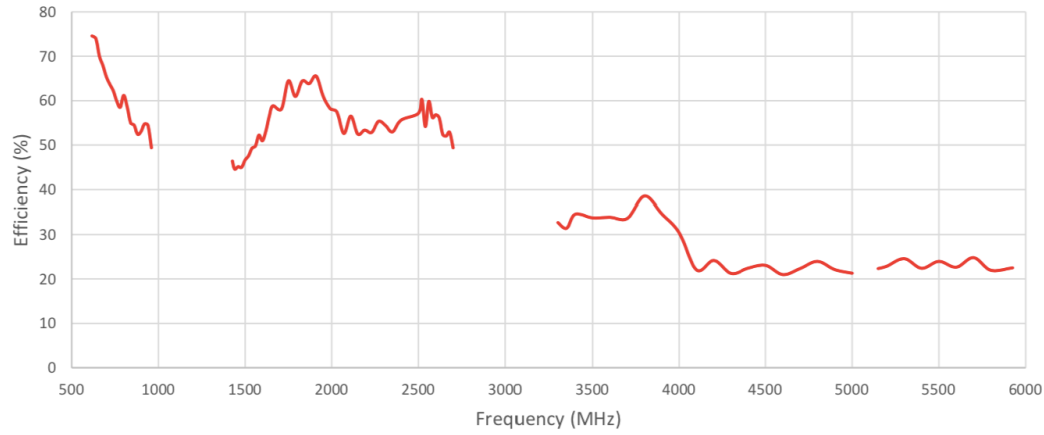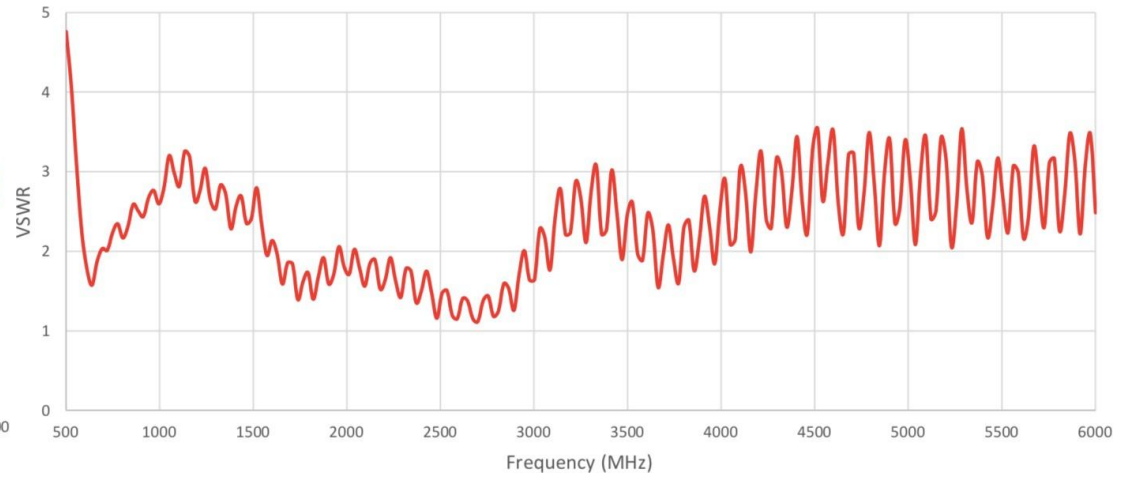
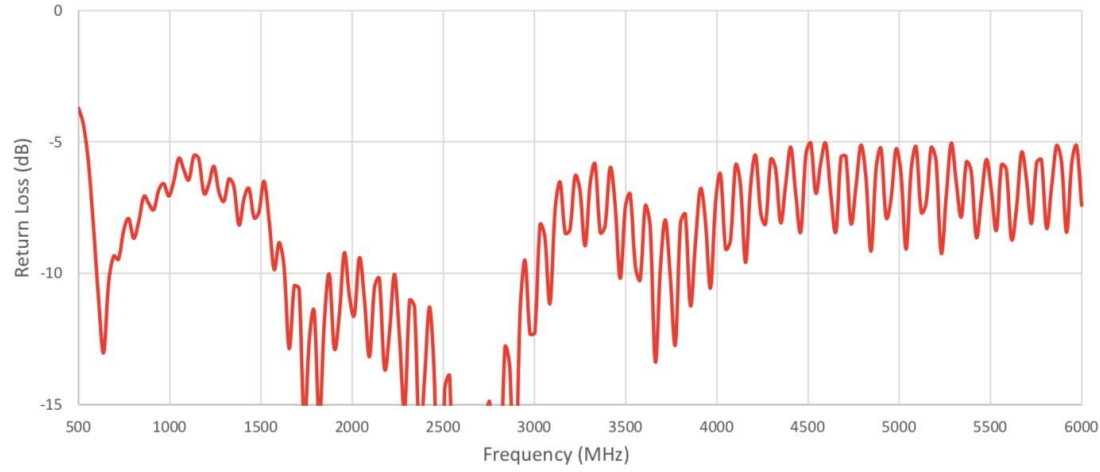




4G 6dBi Magnetic Antenna

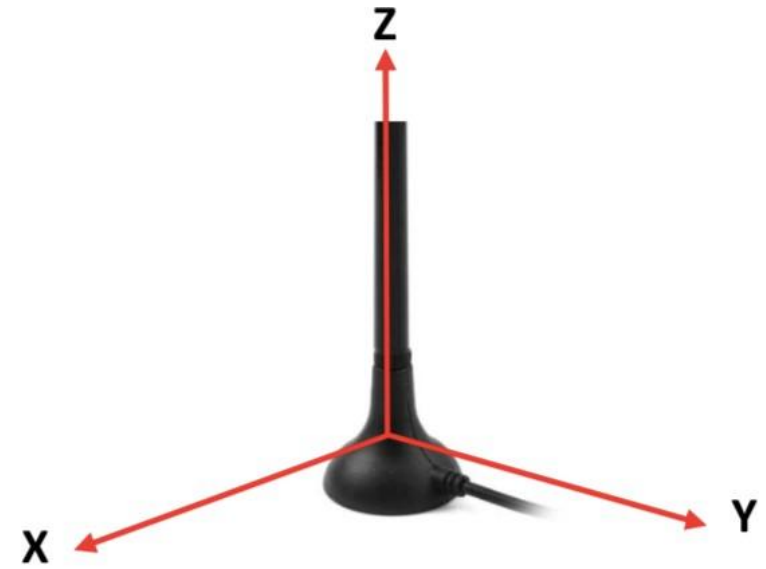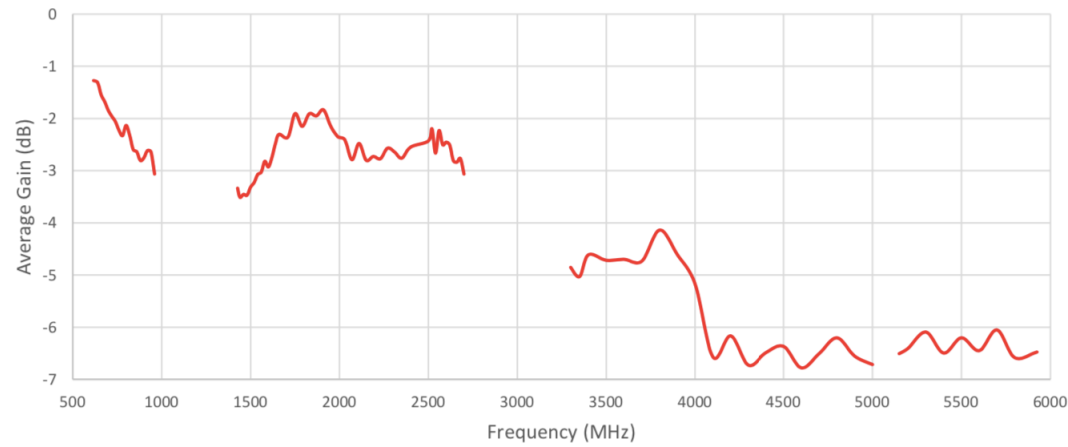

RADIATION PATTERN REFERENCE

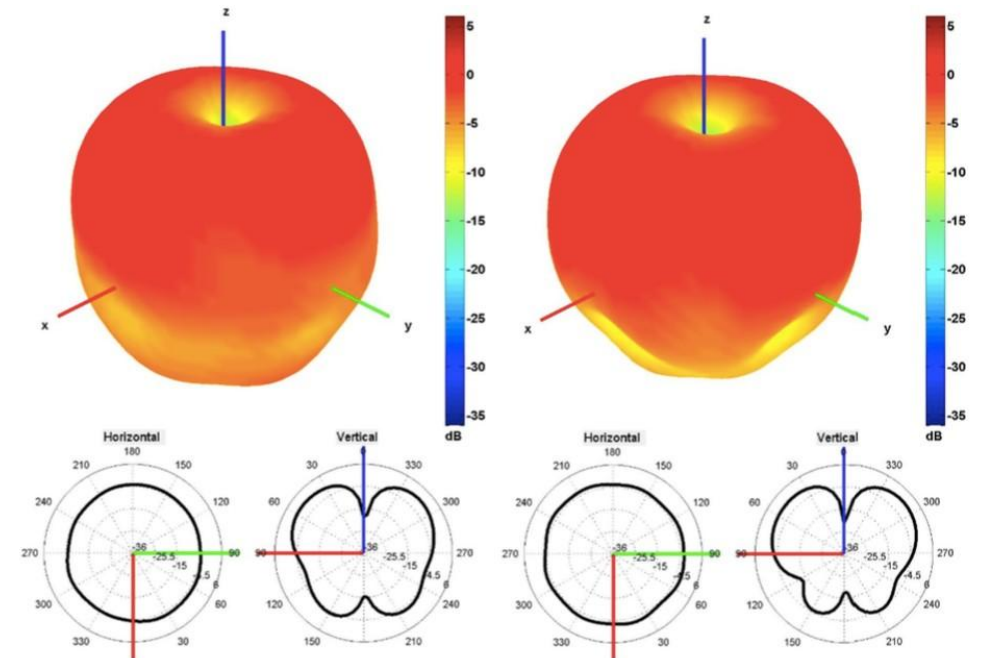
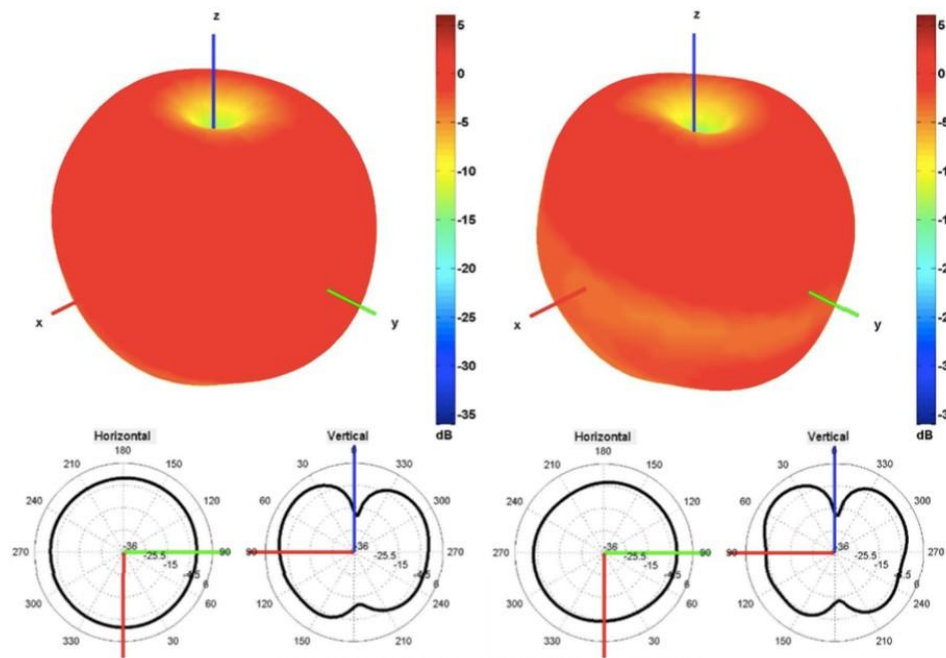






JIETONG DIGITAL

GET CONNECTED



4G 6dBi Magnetic Antenna

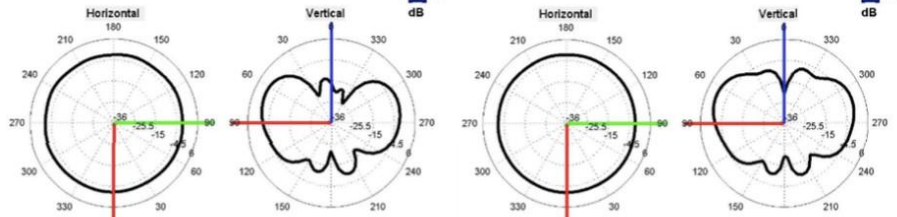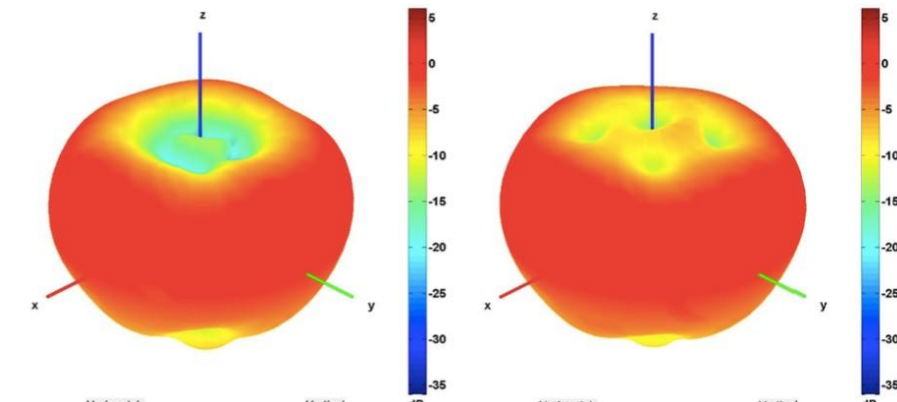



1500 AND 1600 MHz RADIATION PATTERN

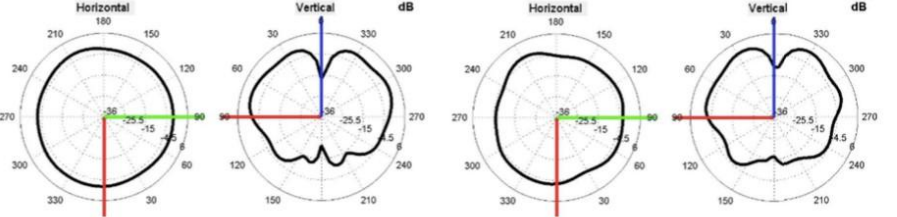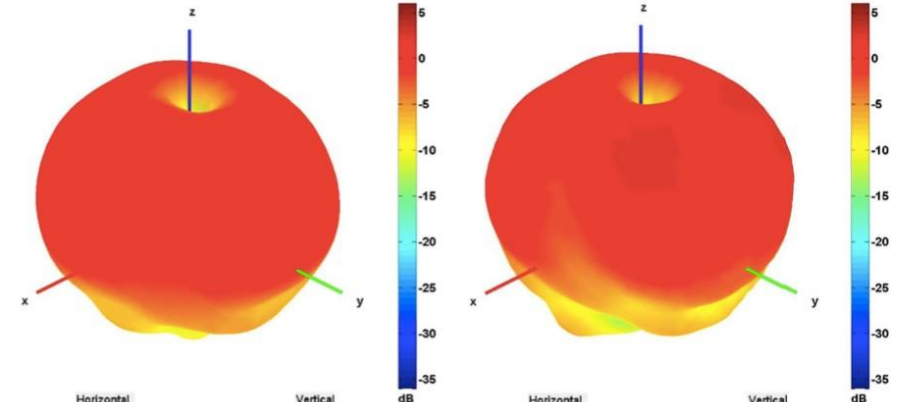

1750 AND 1850 MHz RADIATION PATTERN

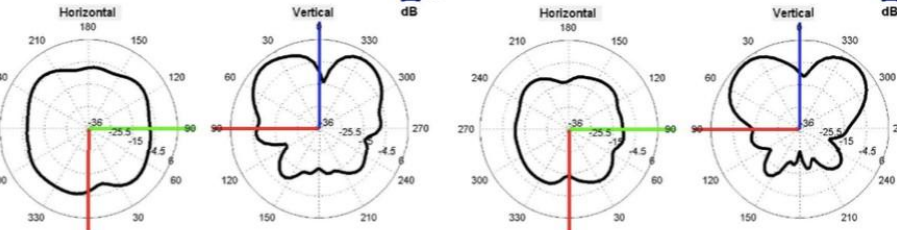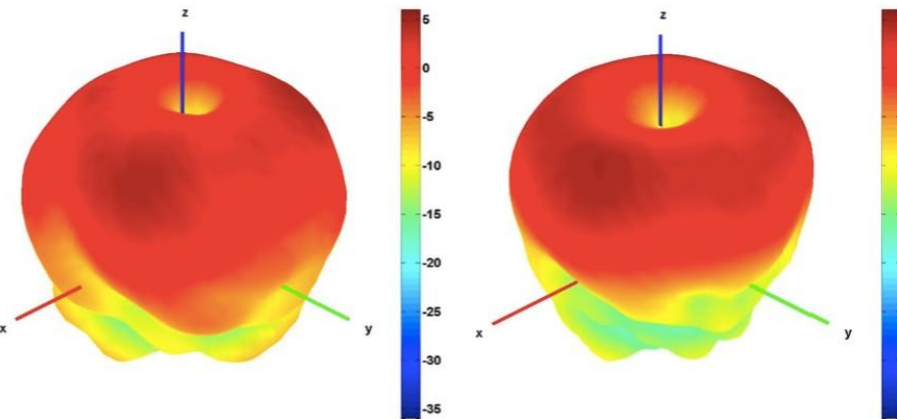

1950 AND 2100 MHz RADIATION PATTERN

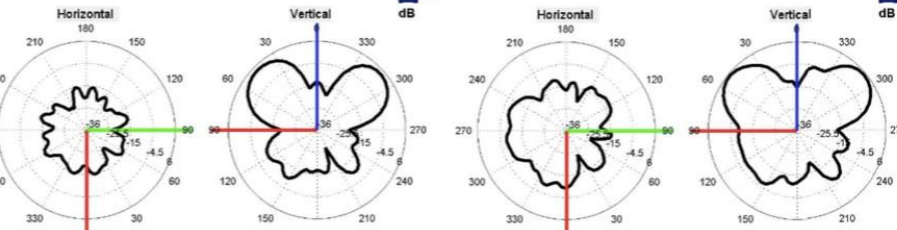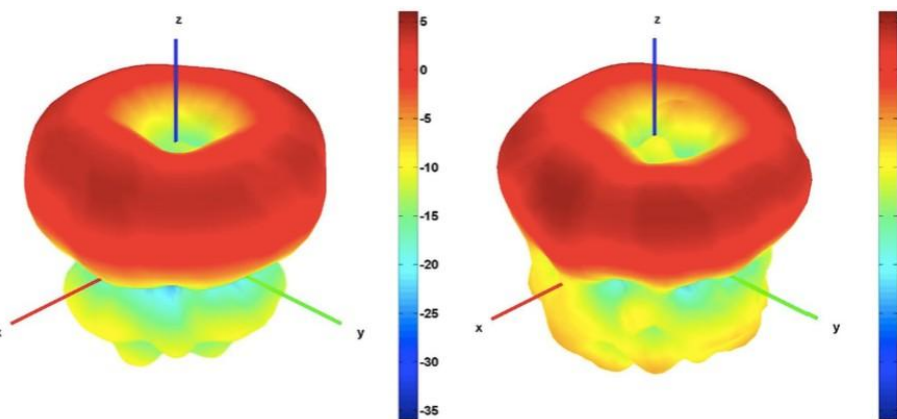


2350 AND 2600 MHz RADIATION PATTERN




JIETONG DIGITAL
GET CONNECTED

4G 6dBi Magnetic Antenna

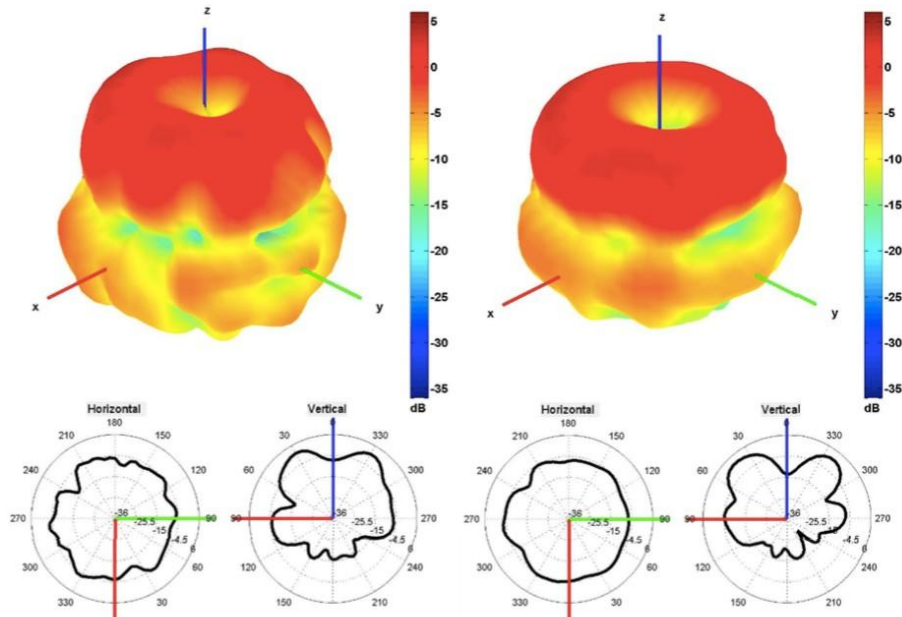

3350 AND 3600 MHz RADIATION PATTERN

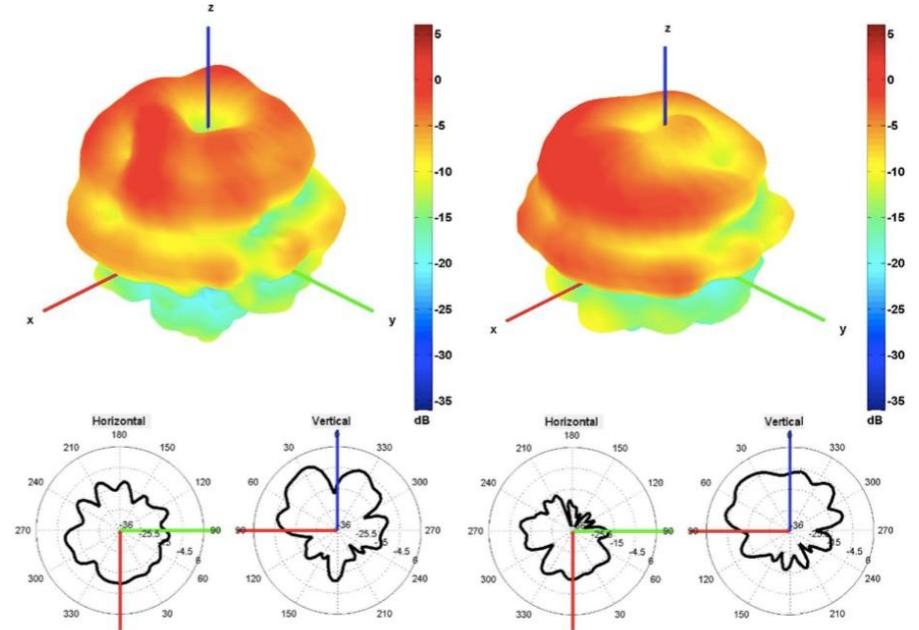

4500 AND 5500 MHz RADIATION PATTERN

