

# N MALE TO N MALE RF ADAPTER


## Specifications of N Male to N Male Adapter:

1. N/M-N/M adapter is in accordance with IEC60169-16: 1982
2. N Male interface screw thread: 5/8-24UNEF-2B
3. Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40±2°C  
Atmospheric pressure: (70~106)Kpa.

5. Dimensions:

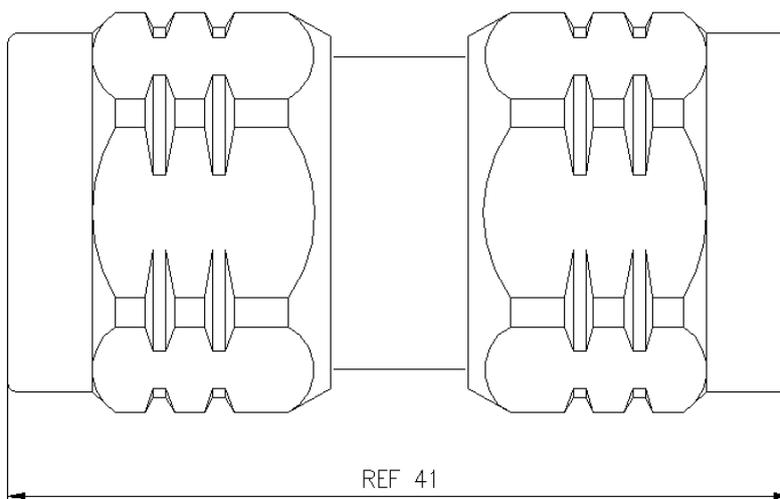

6. Mechanical characteristics:

Frequency range		0~7.2GHz
Contact resistance (mΩ)	Inner conductor	≤2 mΩ
	Outer conductor	≤0.5 mΩ
Insulation resistance (MΩ)		≥5000MΩ
Withstanding voltage AC(V/min)		≥2500V
VSWR(0~7.2GHz)		≤1.10(0~2GHz)
		≤1.15(0~7.2GHz)
Impedance(Ω)		50
Durability		500 Cycles

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.

# N FEMALE TO N FEMALE RF ADAPTER

## Specifications of N Female to N Female Adapter:


1. N/F-N/F adapter is in accordance with IEC60169-16: 1982
2. N Female interface screw thread: 5/8-24UNEF-2B
3. Material and plating:

Model		N/F-N/F
Frequency range		0~7.2 GHz
Contact resistance	Inner conductor	≤2.0 mΩ
	Outer conductor	≤0.5 mΩ
Insulation resistance		≥5000 MΩ
Withstanding voltage AC(V/min)		≥2500 V
VSWR		≤1.08 (0~3 GHz) , ≤1.15 (0~7.2GHz) *
PIM (2X43dBm)		<-160dBc ( <-165dBc Typical )
Impedance		50 Ω
Durability		500 Cycles

\* When results tested by different analyzers are different should adopt the HP testing device as criteria.

4. Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95%  
Temperature: 40±2°C , Atmospheric pressure: (70~106)Kpa.

5. Dimensions:

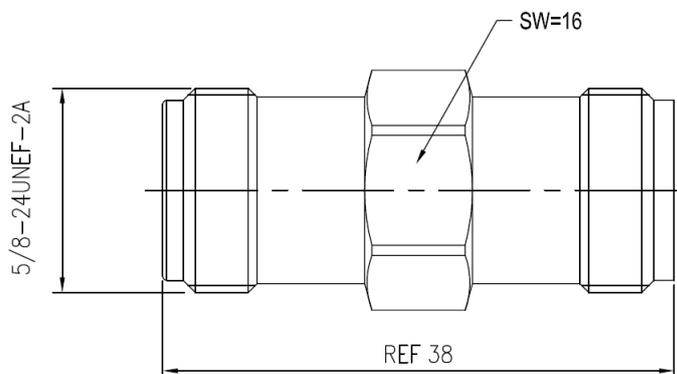

6. Material and plating

Name of Part	Material	Plating	Thickness of Plating
Shell	Brass (HPb59-1)	SY or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	SY or Silver Plated	2μ
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		
Sealing	/		

# N FEMALE TO N FEMALE(BH) RF ADAPTER


## Specifications of N Female to N Female Bulkhead Adapter:

1. N/F-N/F Bulkhead adapter is in accordance with IEC60169-16: 1982
2. N Female interface screw thread: 5/8-24UNEF-2B
3. Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40±2°C  
Atmospheric pressure: (70~106)Kpa.

5. Dimensions:

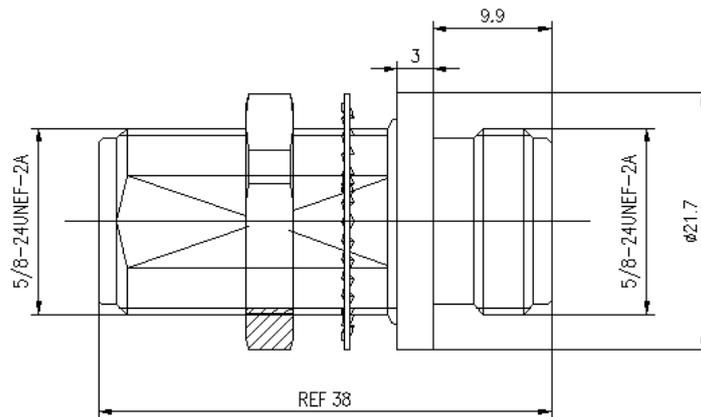

6. Mechanical characteristics:

Frequency range		0~7.2GHz
Contact resistance (mΩ)	Inner conductor	≤2 mΩ
	Outer conductor	≤0.5 mΩ
Insulation resistance (MΩ)		≥5000MΩ
Withstanding voltage AC(V/min)		≥2500V
VSWR(0~7.2GHz)		≤1.06(0~2GHz)
		≤1.15(0~7.2GHz)
Impedance(Ω)		50
Durability		500 Cycles

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.


# N MALE TO N MALE(RA) RF ADAPTER

## Specifications of N Male to N Male Adapter (Right Angle)

1. N/M-N/M(RA) adapter is in accordance with IEC60169-16: 1982
2. N Male interface screw thread: 5/8-24UNEF-2B
3. Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2 $\mu$
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2 $\mu$
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2 $\mu$
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3 $\mu$
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40 $\pm$ 2°C)  
Atmospheric pressure: (70~106)Kpa.
5. Dimensions:

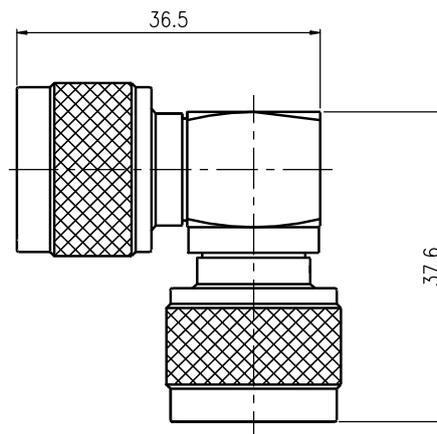

## 6. Mechanical characteristics:

Frequency range	0~7.2GHz	
Contact resistance (m $\Omega$ )	Inner conductor	$\leq 2$ m $\Omega$
	Outer conductor	$\leq 0.5$ m $\Omega$
Insulation resistance (M $\Omega$ )	$\geq 5000$ M $\Omega$	
Withstanding voltage AC(V/min)	$\geq 2500$ V	
VSWR(0~7.2GHz)	$\leq 1.06$ (0~2GHz)	
	$\leq 1.15$ (0~7.2GHz)	
Impedance( $\Omega$ )	50	
Durability	500 Cycles	

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.

# N MALE TO N FEMALE(RA) RF ADAPTER


## Specifications of N Male to N Female Adapter(Right Angle)

1. N/M-N/F(RA) adapter is in accordance with IEC60169-16: 1982
2. N Male/Female interface screw thread: 5/8-24UNEF-2B , N Female interface screw thread: 5/8-24UNEF-2A
3. Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40±2°C)  
Atmospheric pressure: (70~106)Kpa.

5. Dimensions:

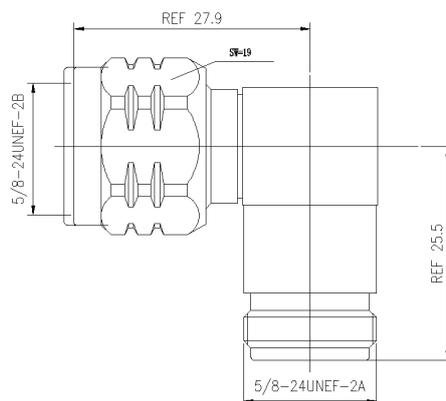

6. Mechanical characteristics:

Frequency range		0~7.2GHz
Contact resistance (mΩ)	Inner conductor	≤2 mΩ
	Outer conductor	≤0.5 mΩ
Insulation resistance (MΩ)		≥5000MΩ
Withstanding voltage AC(V/min)		≥2500V
VSWR(0~7.2GHz)		≤1.06(0~2GHz)
		≤1.15(0~7.2GHz)
Impedance(Ω)		50
Durability		500 Cycles

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN MALE TO N MALE RF ADAPTER


## Specifications of 7/16(DIN) Male to N Male Adapter

- 7/16(DIN)M-N/M adapter is in accordance with IEC60169-16: 1982
- DIN interface screw thread:M29x1.5 ,N interface screw thread:5/8-24UNEF-2B
- Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		

- Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40±2°C)  
Atmospheric pressure: (70~106)Kpa.

- Dimensions:

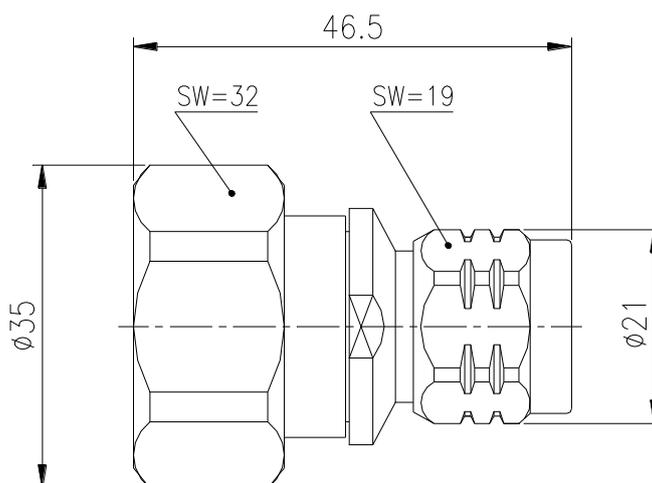

- Mechanical characteristics:

Frequency range	0~7.2GHz	
Contact resistance (mΩ)	Inner conductor	≤1.4 mΩ
	Outer conductor	≤0.45 mΩ
Insulation resistance (MΩ)	≥5000MΩ	
Withstanding voltage AC(V/min)	≥2500V	
VSWR(0~7.2GHz)	≤1.08(0~2GHz)	
	≤1.15(0~7.2GHz)	
Impedance(Ω)	50	
Durability	500 Cycles	

- When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN FEMALE TO N MALE RF ADAPTER


## Specifications of 7/16(DIN) Female to N Male Adapter

- 7/16(DIN)F-N/M adapter is in accordance with IEC60169-16: 1982
- DIN interface screw thread:M29x1.5 ,N interface screw thread:5/8-24UNEF-2B
- Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		

- Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40±2°C)  
Atmospheric pressure: (70~106)Kpa.

- Dimensions:

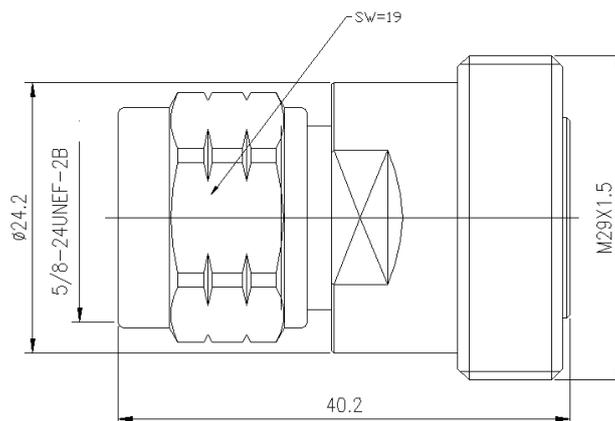

- Mechanical characteristics:

Frequency range	0~7.2GHz	
Contact resistance (mΩ)	Inner conductor	≤1.4 mΩ
	Outer conductor	≤0.45 mΩ
Insulation resistance (MΩ)	≥5000MΩ	
Withstanding voltage AC(V/min)	≥2500V	
VSWR(0~7.2GHz)	≤1.08(0~2GHz)	
	≤1.15(0~7.2GHz)	
Impedance(Ω)	50	
Durability	500 Cycles	

- When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN MALE TO N FEMALE RF ADAPTER


## Specifications of 7/16(DIN) Male to N Female Adapter

- 7/16(DIN)M-N/F adapter is in accordance with IEC60169-16: 1982
- DIN interface screw thread:M29x1.5 ,N interface screw thread:5/8-24UNEF-2B
- Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		

- Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40±2°C)  
Atmospheric pressure: (70~106)Kpa.

- Dimensions:

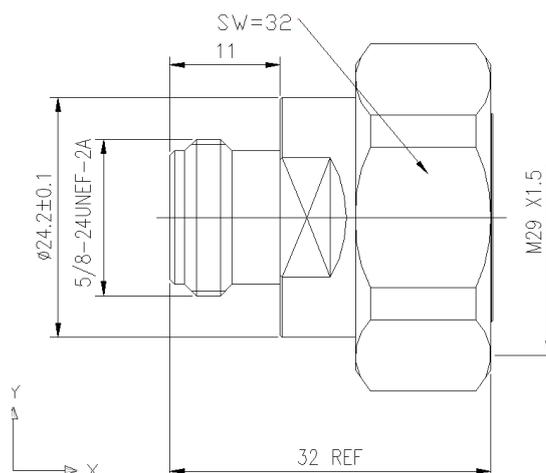

- Mechanical characteristics:

Frequency range		0~7.2GHz
Contact resistance (mΩ)	Inner conductor	≤1.4 mΩ
	Outer conductor	≤0.45 mΩ
Insulation resistance (MΩ)		≥5000MΩ
Withstanding voltage AC(V/min)		≥2500V
VSWR(0~7.2GHz)		≤1.08(0~2GHz)
		≤1.15(0~7.2GHz)
Impedance(Ω)		50
Durability		500 Cycles

- When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN FEMALE TO N FEMALE RF ADAPTER


## Specifications of 7/16(DIN) Female to N Female Adapter

- 7/16(DIN)F-N/F adapter is in accordance with IEC60169-16: 1982
- DIN interface screw thread:M29x1.5 ,N interface screw thread:5/8-24UNEF-2B
- Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	3μ
Insulator	PTEF (SFX-1)		

- Working environment: Working temperature: -55~+155°, Relative moisture : 90%~95% (Temperature: 40±2°C)  
Atmospheric pressure: (70~106)Kpa.

- Dimensions:

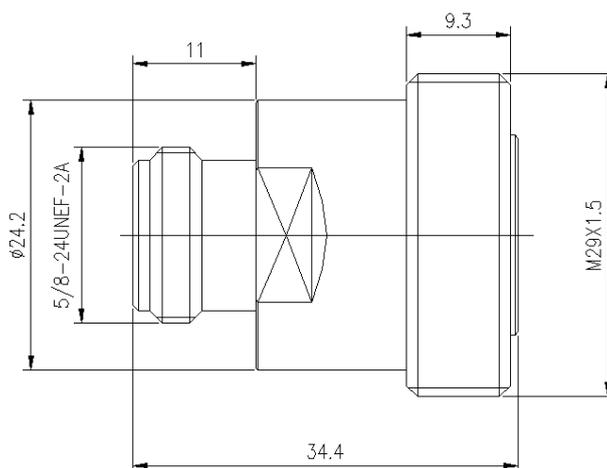

- Mechanical characteristics:

Frequency range	0~7.2GHz	
Contact resistance (mΩ)	Inner conductor	≤1.4 mΩ
	Outer conductor	≤0.45 mΩ
Insulation resistance (MΩ)	≥5000MΩ	
Withstanding voltage AC(V/min)	≥2500V	
VSWR(0~7.2GHz)	≤1.08(0~2GHz)	
	≤1.15(0~7.2GHz)	
Impedance(Ω)	50	
Durability	500 Cycles	

- When results tested by different analyzers are different should adopt the HP testing device as criteria.


# DIN MALE TO DIN MALE RF ADAPTER

## Specifications of 7/16(DIN) Male to 7/16(DIN) Male Adapter

1. DIN/M-DIN/M Adapter is in accordance with IEC60169-16: 1975
2. Interface screw thread: M29\*1.5
3. Material and plating:

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	2μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -40~+85° Relative moisture : 90%~95% (Temperature: 40±2℃)  
Atmospheric pressure: (70~106)Kpa.
5. Dimensions:

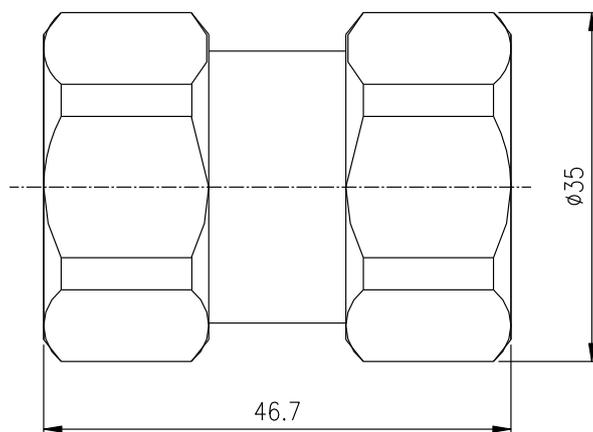

## 6. Mechanical characteristics:

Frequency range		0~7.2GHz
Impedance(Ω)		50
Contact resistance (mΩ)	Inner conductor	≤0.8 mΩ
	Outer conductor	≤0.4 mΩ
Insulation resistance(MΩ)		≥10000MΩ
Withstanding voltage AC(V/min)		≥4000V
VSWR(0~7.2GHz)		≤1.15(0~7.2GHz)
Durability		500 Cycles

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN MALE TO DIN FEMALE RF ADAPTER


## Specifications of 7/16(DIN) Male to 7/16(DIN) Female Adapter

1. DIN/M-DIN/F Adapter is in accordance with IEC60169-16: 1975
2. Interface screw thread: M29\*1.5
3. Material and plating

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	2μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -40~+85° Relative moisture : 90%~95% (Temperature: 40±2℃)  
Atmospheric pressure: (70~106)Kpa

5. Dimensions:

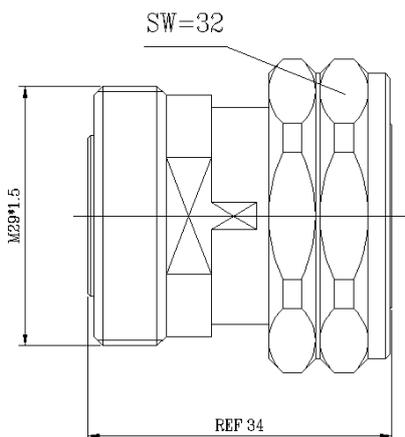

## 6. Mechanical characteristics:

Frequency range		0~7.2GHz
Impedance(Ω)		50
Contact resistance (mΩ)	Inner conductor	≤0.8 mΩ
	Outer conductor	≤0.4 mΩ
Insulation resistance(MΩ)		≥10000MΩ
Withstanding voltage AC(V/min)		≥4000V
VSWR(0~7.2GHz)		≤1.15(0~7.2GHz)
Durability		500 Cycles

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN FEMALE TO DIN FEMALE RF ADAPTER


## Specifications of 7/16(DIN) Female to 7/16(DIN) Female Adapter

1. DIN/F-DIN/F Adapter is in accordance with IEC60169-16: 1975
2. Interface screw thread: M29\*1.5
3. Material and plating

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	2μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -40~+85° Relative moisture : 90%~95% (Temperature: 40±2℃)  
Atmospheric pressure: (70~106)Kpa

5. Dimensions:

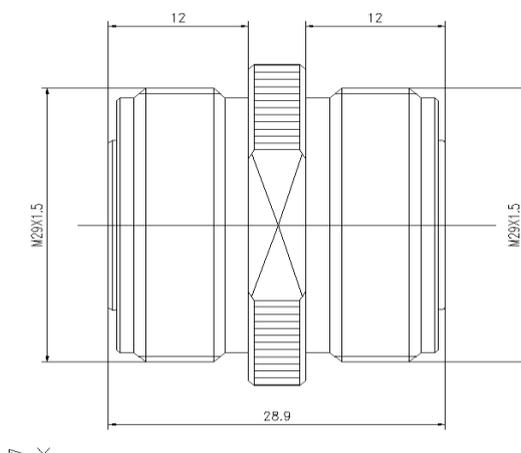

## 6. Mechanical characteristics:

Frequency range		0~7.2GHz
Impedance(Ω)		50
Contact resistance (mΩ)	Inner conductor	≤0.8 mΩ
	Outer conductor	≤0.4 mΩ
Insulation resistance(MΩ)		≥10000MΩ
Withstanding voltage AC(V/min)		≥4000V
VSWR(0~7.2GHz)		≤1.15(0~7.2GHz)
Durability		500 Cycles

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN FEMALE TO DIN FEMALE(BH) RF ADAPTER


## Specifications of Bulkhead 7/16(DIN) Female to 7/16(DIN) Female Adapter

1. DIN/F-DIN/F Adapter is in accordance with IEC60169-16: 1975
2. Interface screw thread: M29\*1.5
3. Material and plating

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	2μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -40~+85° Relative moisture : 90%~95% (Temperature: 40±2℃)  
Atmospheric pressure: (70~106)Kpa

5. Dimensions:

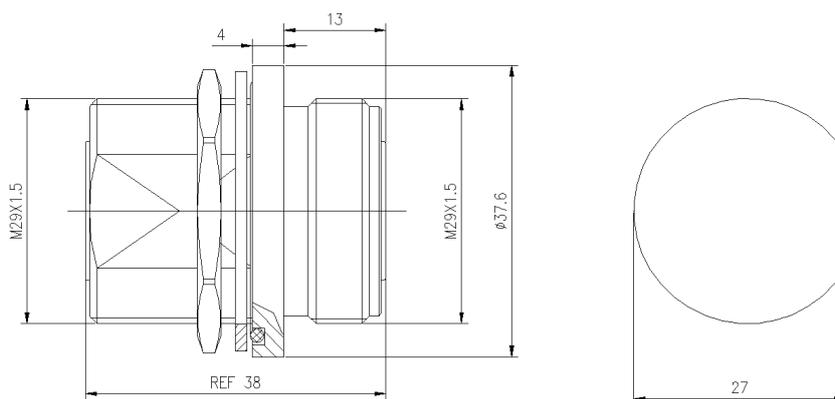

## 6. Mechanical characteristics:

Frequency range	0~7.2GHz	
Impedance(Ω)	50	
Contact resistance (mΩ)	Inner conductor	≤0.8 mΩ
	Outer conductor	≤0.4 mΩ
Insulation resistance(MΩ)	≥10000MΩ	
Withstanding voltage AC(V/min)	≥4000V	
VSWR(0~7.2GHz)	≤1.15(0~7.2GHz)	
Durability	500 Cycles	

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.

# DIN MALE TO DIN FEMALE(RA) RF ADAPTER


## Specifications of Bulkhead 7/16(DIN) Male to 7/16(DIN) Female Right Angle Adapter

1. DIN/M-DIN/F(RA) Adapter is in accordance with IEC60169-16: 1975
2. Interface screw thread: M29\*1.5
3. Material and plating

Name of part	Material	Plating	Thickness of plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	2μ
Insulator	PTEF (SFX-1)		

4. Working environment: Working temperature: -40~+85° Relative moisture : 90%~95% (Temperature: 40±2℃)  
Atmospheric pressure: (70~106)Kpa

5. Dimensions:

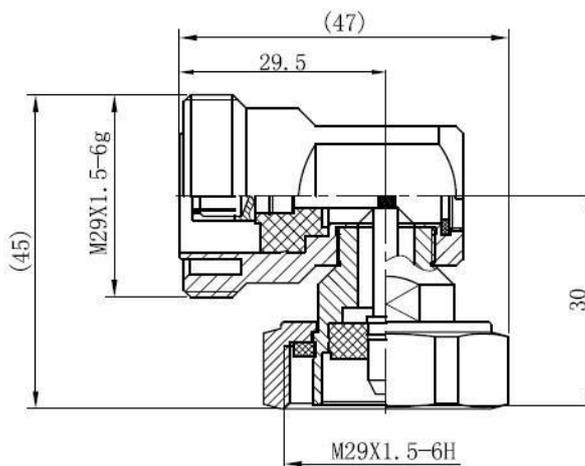

6. Mechanical characteristics:

Frequency range	0~7.2GHz	
Impedance(Ω)	50	
Contact resistance (mΩ)	Inner conductor	≤0.8 mΩ
	Outer conductor	≤0.4 mΩ
Dielectric Resistance	≥500MΩ	
PIM	<-155dBc@2X43dBm	
Withstanding voltage AC(V/min)	≥4000V	
VSWR(0~7.2GHz)	≤1.15(0~7.2GHz)	
Durability	500 Cycles	

7. When results tested by different analyzers are different should adopt the HP testing device as criteria.


## Specifications of QMA Male to SMA Female RF Adapter

Mechanical characteristics:

Item	Specification
Frequency range	0~8.5GHz
Connector	QMA Male to SMA Female
Impedance	50Ω
VSWR(0~7.2GHz)	≤1.15(0~7.2GHz)
Dielectric Withstanding voltage	1000 VRMS
Temperature Range	-65~165°C
Durability	100 Cycles

When results tested by different analyzers are different should adopt the HP testing device as criteria.

Dimensions:

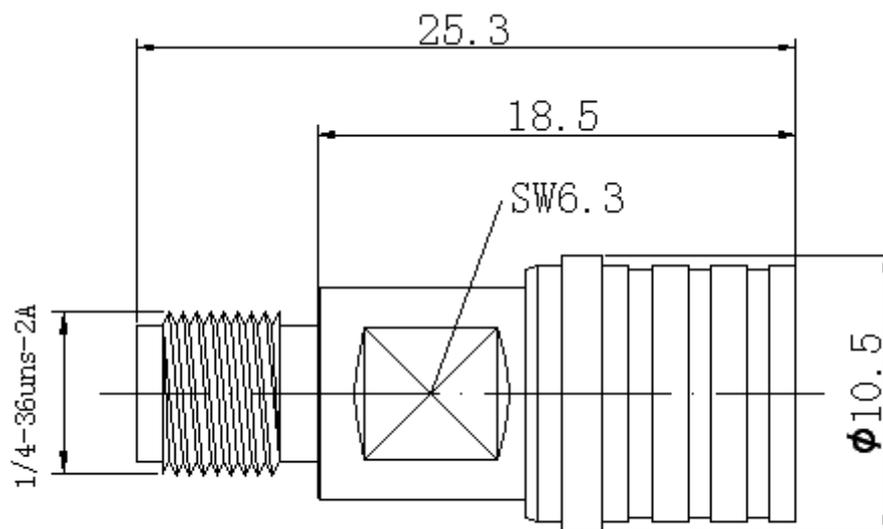

Note: The drawing only for reference, please make the object as the standard.

# SMA FEMALE TO SMA FEMALE(BH) RF ADAPTER


## Specifications of SMA Female to SMA Female(Bulkhead) RF Adapter

Mechanical characteristics:

Item	Specification
Model	SMA/F-SMA/F(BH)
Frequency range	0~12.4GHz
Connector	SMA Female to SMA Female(Bulkhead)
Impedance	50Ω
VSWR	≤1.15
Dielectric Withstanding voltage	1000 VRMS
Temperature Range	-40~155°C
Durability	500 Cycles

When results tested by different analyzers are different should adopt the HP testing device as criteria.

Dimensions:

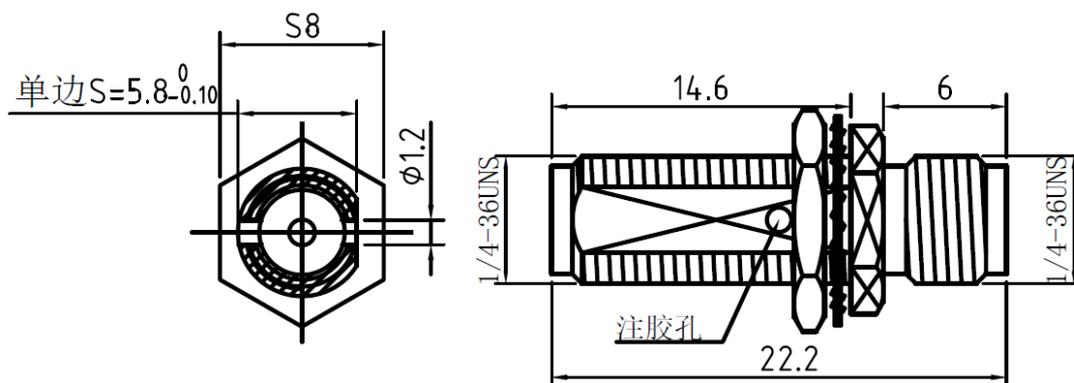

Note: The drawing only for reference, please make the object as the standard.

# low PIM N Female to QMA Male RF ADAPTER


## Specifications of low PIM N Female to QMA Male RF Adapter

Mechanical & Electrical Specification:

Model	N/F-QMA/M(LP)
Frequency Range	0~18GHz
VSWR	≤1.10(0~6GHz)
	≤1.15(0~8.5GHz)
	≤1.25(0~18GHz)
PIM (2X43dBm)	<-155dBc ( <-165dBc Typical )
Plating	Silvering & Ternary Alloy
Insulator	PTFE
Connector	N Female to QMA Male
Impedance	50Ω
Durability	500 Cycles

When results tested by different analyzers are different should adopt the HP testing device as criteria.

Dimensions:

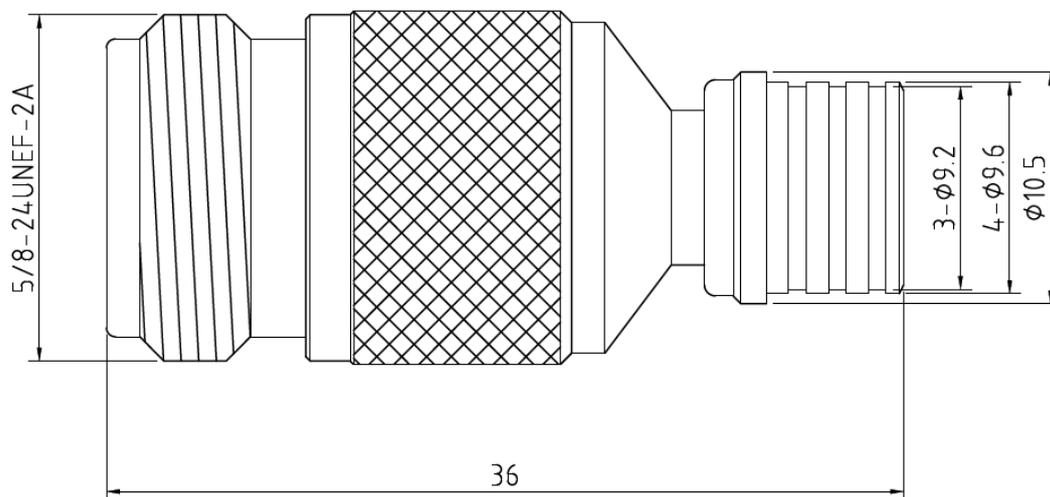

Note: The drawing only for reference, please make the object as the standard.

# Low PIM NEX10 Male to 7/16(DIN) Male RF ADAPTER



Telecommunication Technology & Engineering Accessories

Rev.V1.2

## Specifications of low PIM NEX10 Male to 7/16(DIN) Male RF Adapter

Mechanical & Electrical Specification:


Model	NEX10/M-DIN/M
Frequency Range	0~7.2GHz
VSWR	≤1.15(0~7.2GHz)
PIM (2X43dBm)	<-153dBc ( <-165dBc Typical )
Plating	Silvering & Ternary Alloy
Insulator	PTFE
Connector	NEX10 Male to 7/16(DIN) Male
Impedance	50Ω
Durability	500 Cycles

When results tested by different analyzers are different should adopt the HP testing device as criteria.

## Material & Plating:

Name of part	Material	Plating	Thickness of Plating
Shell	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2~3μ
Out conductor	Brass (HPb59-1)	Ternary Alloy or Silver Plated	2~3μ
Connecting nut	Brass (HPb59-1)	Ternary Alloy or Nickel Plated	2~3μ
Sealing	Silicone rubber		
Probe	Brass (HPb59-1)	Silver Plated	2~3μ
Insulator	PTEF (SFX-1)		

## Dimensions:

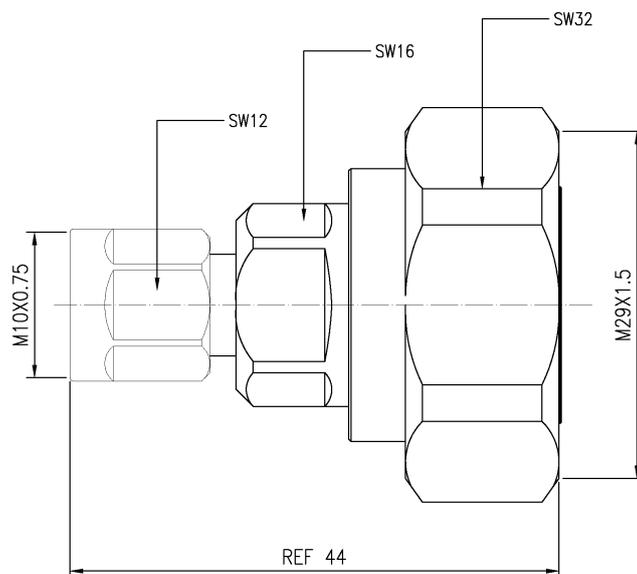

Note: The drawing only for reference, please make the object as the standard.