

TETRA Band Selective Fiber Optic BDA



Tone Spread
Solutions for Wireless Signal

480-512 MHz TS-FOR-500-80-37 (Remote Unit)

TETRA Band Selective Fiber Optic BDA

The Band Selective Fiber Optic BDA is designed to solve problems of weak mobile signal in the place that is far away from the Base Transceiver Station (BTS) and has fiber optic cable network underground. The system consists of two parts: Master Unit and Remote Unit. The Master unit captures the BTS signal via donor antenna, then converts it into optic signal and transmits the amplified signal to the Remote Unit via fiber optic cable. The Remote unit will reconvert the optic signal into RF signal and provide the signal to the areas where network coverage is inadequate. And the mobile signal is also amplified and retransmitted to the BTS via the opposite direction.

Key features

- Adopting WDM module to realize long-distance transmission.
- Tx/Rx control and alarm messages can be transmitted via one fiber optic cable.
- One MU support Up to 8 RUs.
- Linear power amplification to effectively suppress inter-modulation and spurious emission.
- Stable and improved signal transmission quality.
- Aluminum-alloy casing with IP65 protection has high resistance to dust, water and corrosion.
- Adopting filter with highly selectivity and low insertion loss eliminates interference between uplink and downlink.
- USB port provides a link to a notebook for local supervision or to the built-in wireless modem to communicate with the NMS (Network Management System) that can remotely supervise repeater's working status and download operational parameters to the repeater.

Advantages

- ☑ **Multi_standards/Multi_operators**
- ☑ **Remote control**
- ☑ **Digital features:**
 - Balancing operator level (Option)**
- ☑ **Low consumption**




Specifications

Technical characteristics

Items		Specifications
System		TETRA
Working Frequency	Uplink	480~512MHz (Assign frequencies according to NCC assignments)
	Downlink	480~512MHz (Assign frequencies according to NCC assignments)
Bandwidth		Customized according to customer needs
Maximum RF Output Power(Downlink)		≥ 37dBm@Composite Output Power ≥ 33dBm@2ch(Carriers) ≥ 30dBm@4ch(Carriers)
Maximum Gain(Wireless Access)		≥ 80dB(MU+RU)
Manual Gain Adjustment Range		≥ 25dB@Step of 1dB
ALC/AGC		Support
VSWR		≤ 1.5
Noise Figure		≤ 5dB
OIP3		≥ 50dBm
Spurious Emission		≤ -13dBm
System Delay		≤ 5μSec
I/O Impedance		50Ω
Connector	RF Connector	1xN-Female or 7/16DIN
	Optic Connector	1xLC/UPC
Fiber Optical Type		Single Mode
TX/RX Fiber Core		Share one core
Optical Output Power		0±3dBm(1310nm)
Optical Receiver Sensitivity		≥-15dBm
Temperature Range		Operation: -25°C ~ + 55°C
Relative Humidity Range		≤ 95% (Non Condensing)
Power Supply		AC100~240V, 50/60Hz or DC48V
Application		Indoor or Outdoor(IP65)
Mounting		Wall Mounting
Dimensions		447mm X 357mm X 171mm
Weight		16kg
Local Control		Via USB Interface and Wi-Fi Hotspot
Remote Monitoring Module		Through MU via Fiber Optical Cable

Network Management System (NMS)

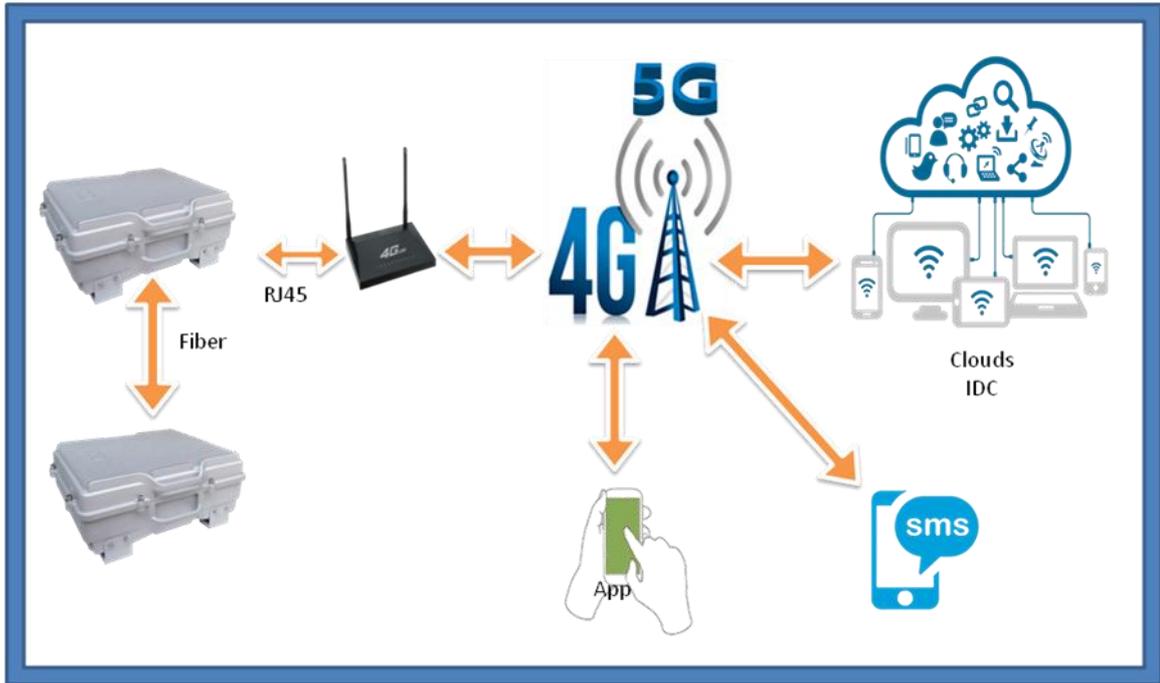

Applications

To expand signal coverage or enhance signal blind area where radio network signal is weak or unavailable.

- | | | | |
|-----------------|-------------------------|-------------|--------------|
| ■ Public Safety | ■ Transportation | ■ Utilities | ■ Government |
| ■ PAMR | ■ Commercial & Industry | ■ Military | ■ Oil & Gas |

