

微帶二功分器

Micro Strip 2 Way Power Splitter



Tone Spread
Solutions for Wireless Signal

225-400MHz(N-F)

TS-PS-2240-2CNI


Telecommunication Technology & Engineering Accessories

Rev.V1.0

規格(Technical & Mechanical Specifications)

Frequency Range(MHz)	225-400
Type	2 – Way
Splitting Loss (dB)	3.0 dB
Insertion Loss (dB)	≤0.7
VSWR	≤1.3
Isolation (dB)	≥19
Power(W)	50W
Impedance(Ω)	50
Environmental Specifications	
Operating Temperature(°C)	-20° C to +50° C
Size(mm) ±10%	113.6×129×18
Relative humidity	≤95%
Applications	Indoor IP55
Mechanical Data	
RF Connector	N-F
Colour	Black or Custom

Product Drawing:

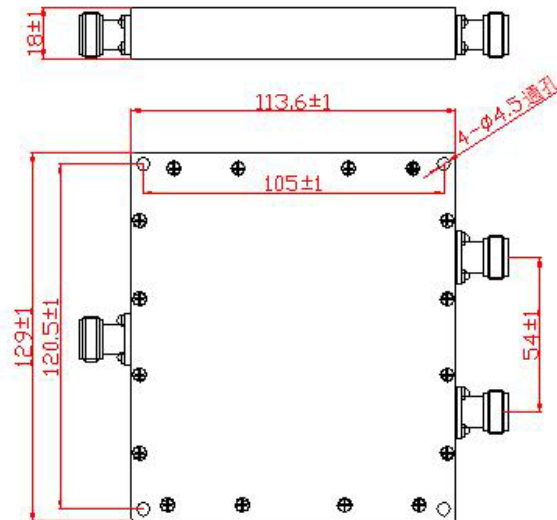

Note: The picture is only for reference, please make the object as the standard

All specifications are subject to change without notice.

©2021 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved.

Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan

TEL:+886-2-28828979

FAX:+886-2-28829196

E-mail: sales@tspd.com.tw