

Power Divider / Combiner

Model :TSPD8-4-8G-SF



Tone Spread
Solutions for Wireless Signal

Telecommunication Technology & Engineering Accessories

Rev.V1.1

Electrical Specifications:

Item	Specs.	Unit
Freq. Range	4~8	GHz
Insertion Loss	≤1.5 (Not include Theory loss)	dB
Isolation	≥17	dB
VSWR	≤1.5	
Amplitude Balance	≤0.5	dB
Phase Balance	±3	deg

Featured:

Small package, low insertion loss and high reliability.


Other Specs:

Item	Specs.	Unit
Impedance	50	Ω
Connector	SMA-F	
Operating Temp.	-40~+85	°C
Power Handling	10	W
Surface	Black	

Installing Instruction:

1. Keep the surface is flat when installing in avoid to the products to be out of shape by screw.
2. Please wear gloves to install the products to prevent surface oxidation.
3. Please contact us if the whole temp. is over 125°C or let us know before order.
4. Please don't immerse the product in lotion when cleaning the products.

5. Outline Drawing: Unit mm

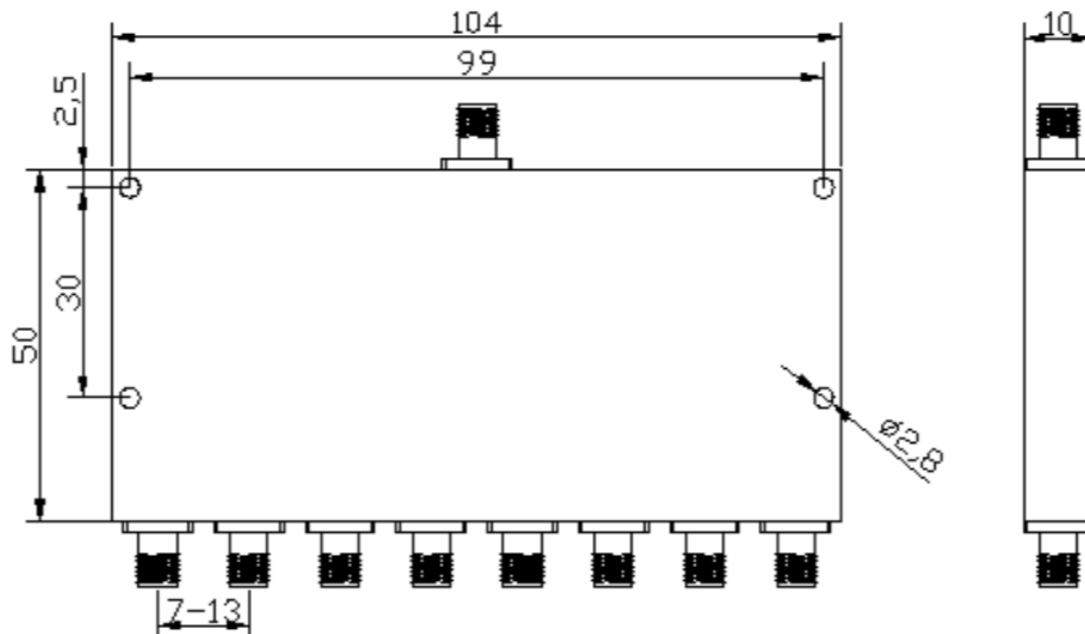

All specifications are subject to change without notice.

©2019 TONE SPREAD TECHNOLOGY CO., LTD. All Rights Reserved. Website <http://www.tspd.com.tw>

ADD:11169 2F,No 141,Fu-Gang St. Taipei ,Taiwan TEL:+886-2-28828979 FAX:+886-2-28829196 E-mail: sales@tspd.com.tw