

VHF DUPLEXER

JTD-DUP-65-74-150H-N



JIETONG DIGITAL

GET CONNECTED


Telecommunication Technology & Engineering Accessories

Rev.V1.0

N Type VHF Duplexer (65-158MHz):

Item	JTD-DUP-65-74-150H-N	Product Picture
Frequency Range (MHz)	TX 65.3 MHz RX 74.5 MHz	
Bandwidth(kHz)	±100kHz	
VSWR	≤1.4	
Frequency Spacing(MHz)	9.2MHz	
Insertion Loss (dB)	≤1.5dB	
Isolation (dB)	≥75dB	
Power (W)	100W	
Impedance (Ω)	50Ω	
Temperature Range (°C)	-20~+50°C	
Relative Humidity	0% to 100%	
Connector	N-Female	
Weight(kg)	1.6KG	
Dimensions(mm)	226×190×40(±0.5mm)	

Product Drawing:

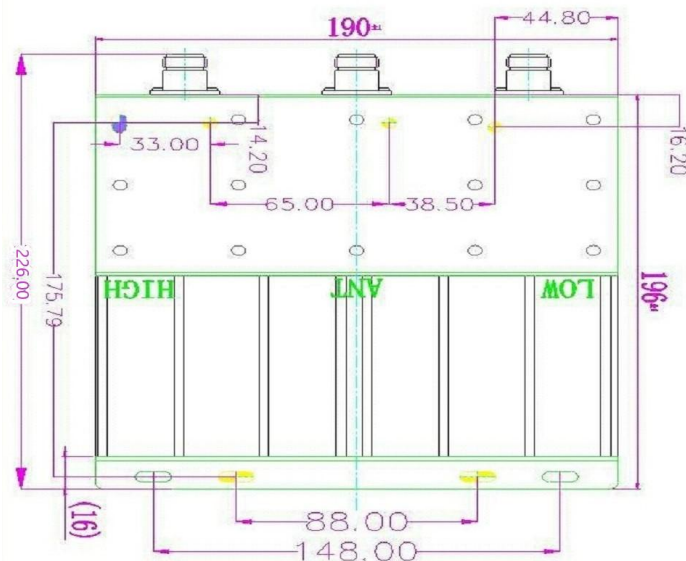

Note: The picture is only for reference, please make the object as the standard

All specifications are subject to change without notice.

©2021 Jietong Digital Technology Ltd. All Rights Reserved.

Website <http://www.jtd.com.tw>

Add:11169 2F,No 141,Fu-Gang St. Shilin Dist., Taipei City, Taiwan

Tel:+886-2-28828979

Fax:+886-2-28829196

E-Mail: sales@jtd.com.tw