

# UHF DUPLEXER

## JTD-DUP-403-408-100H-N



**JIETONG DIGITAL**

GET CONNECTED


Telecommunication Technology & Engineering Accessories

Rev.V1.0

N Type UHF Duplexer (403-408MHz):

Item	JTD-DUP-403-408-100H-N	Product Picture
Frequency Range ( MHz )	403~408 MHz	
Bandwidth(kHz)	±100kHz	
VSWR	≤1.5	
Frequency Spacing(MHz)	≤5MHz	
Insertion Loss ( dB )	≤1.4dB	
Isolation ( dB )	≥80dB	
Power (W)	100W	
Impedance ( Ω )	50Ω	
Temperature Range ( °C )	-20~+50°C	
Relative Humidity	0% to 100%	
Connector	N-Female	
Weight(kg)	2.2KG	
Dimensions(mm)	225×258×40(±0.5mm)	

Product Drawing:

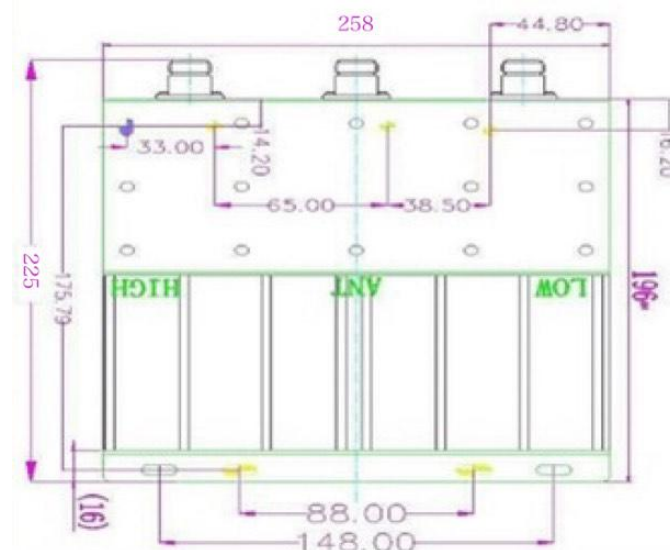

Note: The picture is only for reference, please do not make the object as the standard

All specifications are subject to change without notice.

©2021 Jietong Digital Technology Ltd. All Rights Reserved.

Website <http://www.jtd.com.tw>

Add:11169 2F,No 141,Fu-Gang St. Shilin Dist., Taipei City, Taiwan

Tel:+886-2-28828979

Fax:+886-2-28829196

E-Mail: [sales@jtd.com.tw](mailto:sales@jtd.com.tw)